


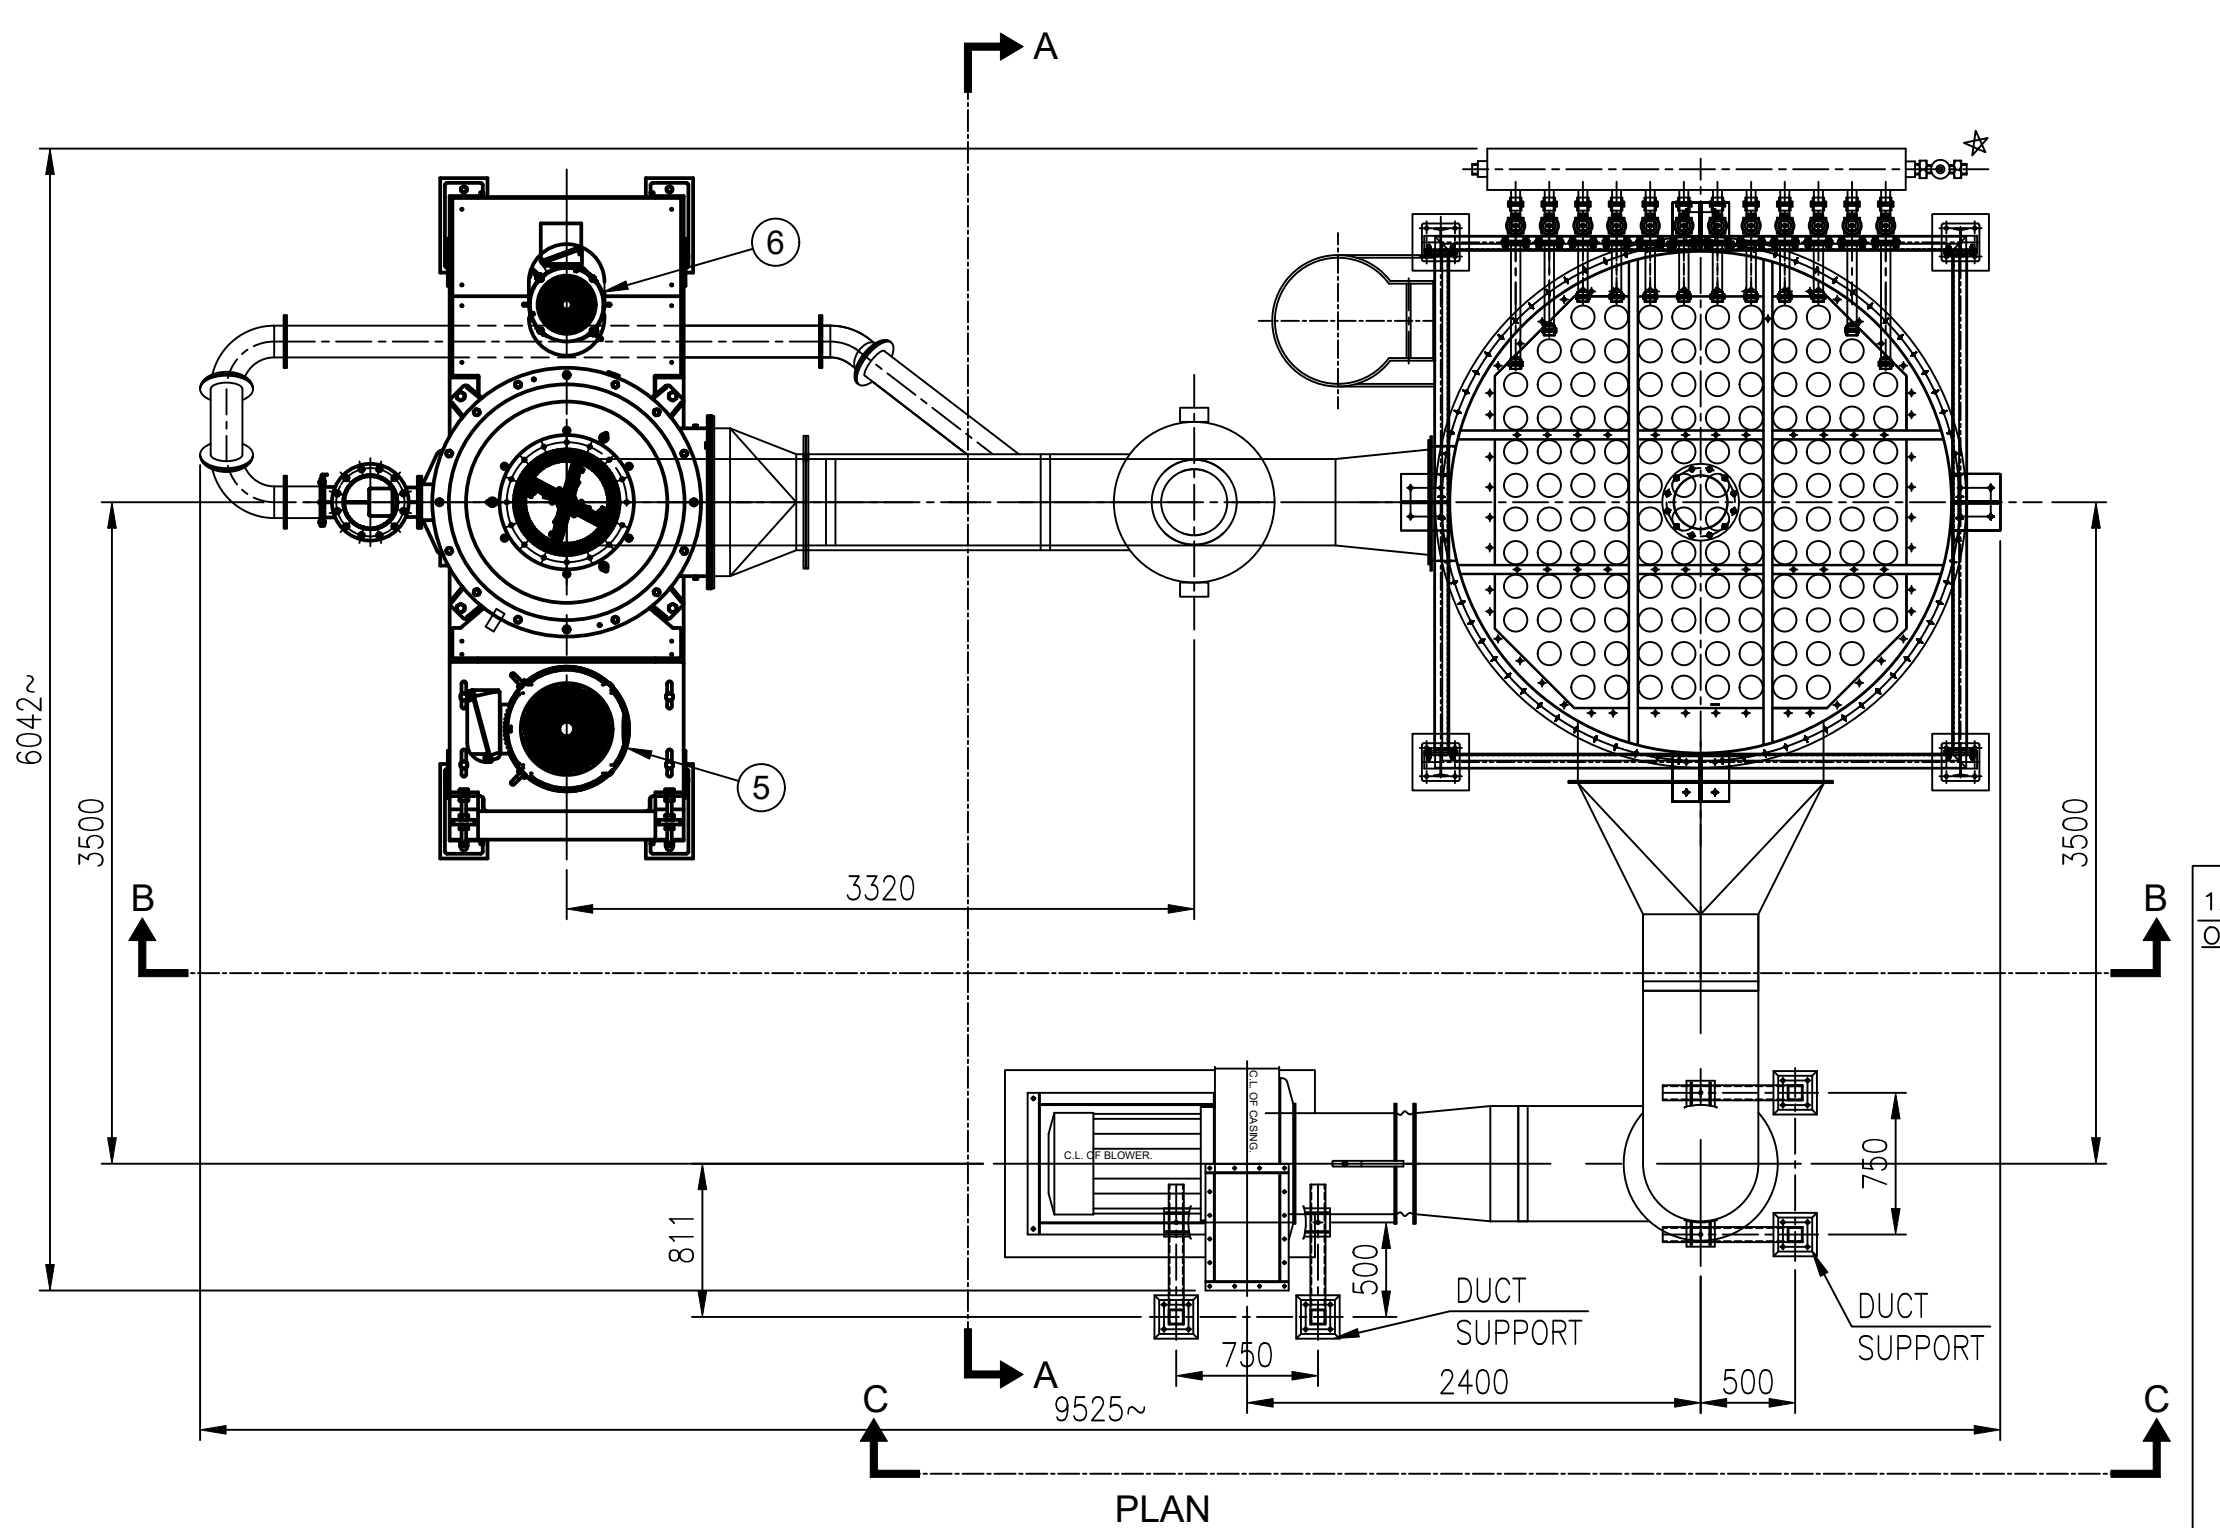

LOAD DATA

OPTION-2

1. ALL DIMENSIONS ARE IN MM UNLESS NOTED.
2. DO NOT SCALE THE DRAWING.
3. IF IN DOUBT ASK.
4. ALL MOTORS ARE SUITABLE FOR 3ø 415V ±10%,50HZ ±5%,AC SUPPLY.
WITH IP-55 ENCLOSURE,F-CLASS INSULATION,45° AMBIENT
5. COMPRESSED AIR REQUIRED 5 HP CLEAN DRY & OIL FREE
COMPRESSED TO 7 TO 2 kg/cm² g TO BE ARRANGED BY CLIENT
6. GASKET - WHITE NEOPRENE RUBBER FOOD GRADE
7. DUCTING SUPPORTS TO BE GIVEN BY CLIENT AT SITE IF REQUIRED.
8. CONTROL PANEL CAN BE KEPT ANY WHERE AS PER SPACE AVAILABLE BUT NEAR MILL.
9. PAINT SPEC : SYNTHETIC ENAMEL PAINTING.(WHITE)

SR.No	PART No.	QTY	DESCRIPTION	MATERIAL	SIZE	REMARK
CLIENT			-			
CONSULTANT			-			
RIECO'S S.O.No.			-			
CLIENT'S P.O.No.			-			

										RIECO INDUSTRIES LTD. 1162/2 SHIVAJINAGAR,BEHIND OBSERVATORY,PUNE-411 005 (INDIA)												SIGN		DATE		
TITLE <u>200 ACM PLANT LAYOUT</u>										DRAWN		SRK		07	11	2022										
										CHECKED		NSP		07	11	2022										
										APPROVED		NSP		07	11	2022										
REFERENCE DRG. No.										SCALE		DRAWING No					REV.		SHEET							
REPLACES DRG. No.										1:40		A0xxxxxxx					0		1 OF 1							